



ELECTRICAL CHARACTERISTICS

Model	Unit	BQ320-72P	BQ325-72P	BQ330-72P	BQ335-72P
Nominal Power	Pm (Wp)	320	325	330	335
Open Circuit Voltage	Voc (V)	46.12	46.38	46.40	46.70
Short Circuit Current	Isc (A)	9.09	9.17	9.28	9.35
Voltage at Nominal Power	Vmp (V)	37.28	37.39	37.65	37.83
Current at Nominal Power	Imp (A)	8.58	8.69	8.77	8.87
Module Efficiency	(%)	16.5	16.7	17.0	17.2
Temp. Coefficient	Voc (%/°C)	-0.330			
Temp. Coefficient	Isc (%/°C)	+0.058			
Temp. Coefficient	Pm (%/°C)	-0.400			
NOCT	(°C)	Irradiance 100W/m ² , cell temperature 25°C, AM1.5G			

I-V CURVE

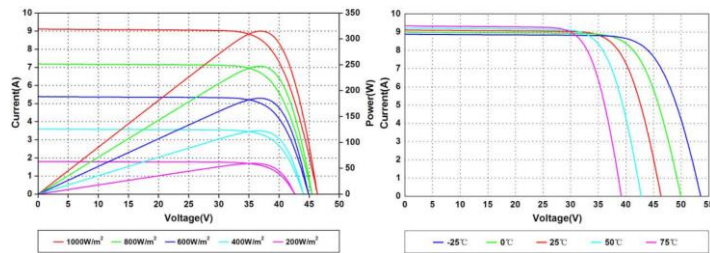

PHYSICAL CHARACTERISTICS




MECHANICAL CHARACTERISTICS

Cells Type	Polycrystalline 156.75 x 156.75
Number of Cells	60 (6 x 10)
Dimensions	1656 x 992 x 40mm
Weight	22.5KG
Front Cover	Tempered Glass with ARC (AR Coating)
Frame Material	Anodized Aluminum Alloy

STANDARD PACKAGE

Module Quantity / Pallet	26pcs
Module Quantity / 20ft Container	260pcs
Module Quantity / 40ft Container	616pcs

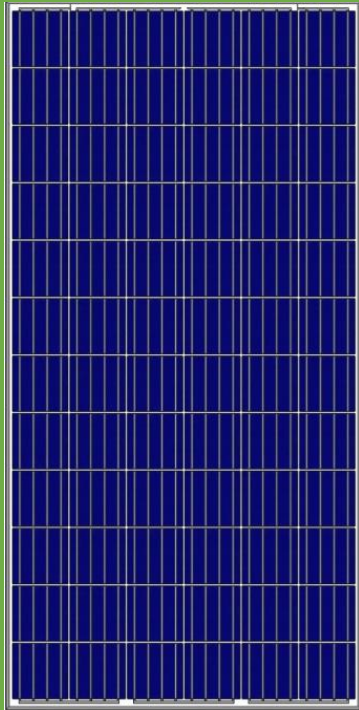

KEY FEATURES

- ❖ POWER TOLERANCE (±3%)
- ❖ PID RESISTANCE
- ❖ SALT MIST RESISTANCE
- ❖ AMMONIA RESISTANCE
- ❖ HIGH STRENGTHENED DESIGN
(Passed 5400Pa Test Under the New IEC Standard)

CERTIFICATES



WARRANTY

BQ Linear Warranty • Standard Step Warranty

10 Years Product Warranty - 25 years Linear Power Warranty

